

Instruction Manual

Battery Chargers

NOVA-2000F Series: IP20 Load-dependent fan-cooled. With one (1) or multiple, selectable charge profiles, customized parameters. CAN-bus / Ignition-Lock (optional).



Safety Rules and General Warnings

- Persons, who are not able to use the charger in a safe way, because of their physical, sensory or mental incompetence, or because of their lack of experience, should not use without the control or instruction from a skilled or qualified person.
- The charger runs with 180-240 Volts alternating current, which is not suitable for children – Danger of Life. And beware of risk of electric shock at all times.
- Ensure sufficient air ventilation; do not cover the vent outlet while charging in progress.
- Avoid flammable gases, solvents or vapours all the time. Prevent open flame or sparks while charging in progress. Explosion RISK!
- The charger is exclusively designed for charging rechargeable batteries and must not be used for other purposes. Corresponding model should be selected for particular lithium-based or lead-based batteries.
- You should take into consideration of the charging instructions issued by the battery manufacturer before charging. Check also if the charge profile fits your battery and application.
- DO NOT OPEN or DISMANTLE the charger. Repair work must only be processed by authorized technical staff.
- If the mains connection of the charger is damaged, it must be replaced with an original wire which is available at MEC or authorized dealers.
- NEVER place the charger on top of the battery while charging in progress.
- The charger should be protected against direct solar radiation or temperatures over 40°C.
- In case of obvious damage or malfunctioning, disconnect the charger from the mains supply and protect against unintended reconnection.
- The DC cable must not be cut, shortened or extended under any circumstances.
- Keep the charger in dry room (rel. humidity <80%). Clean with dry cloth only. Avoid fluid of any kind to get into the charger.


Special Features

- IP20 Load-dependent fan cooling; spray-painted metal housing
- Microprocessor-based 4-Step charging technology with soft start and automatic re-start of the charge cycle
- Battery "wake-up" function by sending out programmed "wake-up" pulses
- Optimal and gentle charging for the greatest possibility of charge cycles guaranteed with high frequent combinatorial circuit technology
- 3 Selectable battery types (Lead acid, Lithium iron phosphate and Lithium ion)
- LED indicators showing corresponding charge status and errors
- Protection against overload, short circuit, reverse polarity or over temperature

Product Configuration

Models Targeting Lithium-based Batteries

1. IR-Interface LEDs	2. Red Mains LED	3. Yellow Charge LED
4. Green Full LED	5. Red Error LED	6. Mains Socket
7. On / Off Switch	8. Cooling Fan	

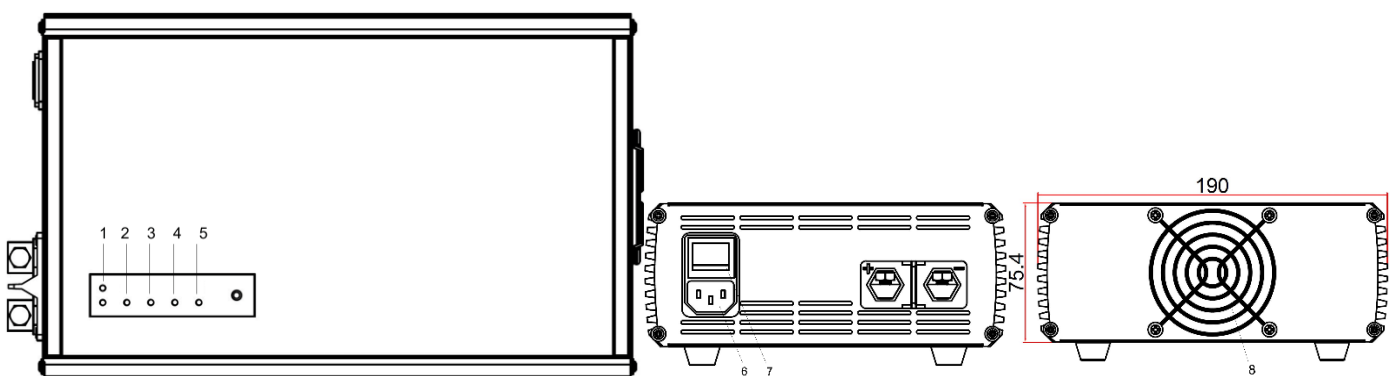

Preparation – Before Charging

General Checking

- Check thoroughly the charger itself including all the cables show no damages
- Take into consideration the charging instruction issued by the battery manufacturer

Charging Cable – Polarity Checking

WARNING: Check the polarity before mounting onto a plug:

- Red cable = Plus (+)
- Black cable = Minus (-)

DC Mains Supply Checking

- Make sure the DC cable must not be cut, shortened or extended under any circumstances
- Make sure the mains supply complies with the technical specification requirements of the charger

Connecting the Charger to the Battery

- Make sure the charger is switched off and disconnected from the mains supply
- Connect the terminals of the charger to the battery (Red cable to the positive (+) terminal of the battery; then Black cable to the negative (-) terminal)
- If the battery is built-in within a vehicle, the Black cable can be connected to the negative (-) terminal of the battery or the body of the vehicle; make sure the connection is done with a safe distance from the fuel line and take into consideration of the battery and vehicle manufacturer
- Finally connect the power cable of the charger to the mains supply, and switch on the charger

Charging the Battery

The charging process starts automatically and runs through the following stages:

Getting Ready: Auto Wake-up

Yellow Charge LED and Green Full LED are blinking alternately. During this pre-charge phase, the charger sends out series of controlled current pulses to reactivate the BMS (if any) and bring in a voltage to the battery for getting ready for the charging process. If no battery or defected battery pack is connected, the Red Error LED blinks. In this case, switch off the charger and check the battery pack.

Phase 1: Soft Start

Yellow Charge LED keeps on lighting. The charger regulates the initial charging current to better prolong the battery life.

Phase 2: Constant Current Charging

Yellow Charge LED blinks slowly. The battery is being charged to 80% of its capacity at this stage.

Phase 3: Constant Voltage Charging

Yellow Charge LED blinks quickly. The battery is being charged to its maximum capacity. When the Green Full LED turns on, the charger can now be disconnected from the battery.

Phase 4: Float Charging (for lead-based batteries only) or Auto Restart

Green Full LED keeps on lighting indicate the battery has reached its full capacity. If the battery keeps connecting to the charger, auto restart of the charging cycle will take place after 30 days or when the battery voltage has dropped to under 3.6V/cell (Li-ion Battery) or 3.2V/cell (LiFePO4 Battery).

Disconnect the Charger from the Battery:

1. First, disconnect the charger from the mains supply
2. Then, disconnect the charger from the battery

After disconnecting the charger from the mains, please wait at least 5 seconds to reactivate the charger if in need – otherwise damages may be resulted.

Charging Advice and Battery Care

Charging Advice:

- If the charger must be disconnected from the battery during the charging process, please FIRST disconnect the charger from the mains supply. The continuation of the charging process is equal to a new charging cycle; all relevant points of the Operating Instructions have to be considered.
- To lengthen the lifetime of the battery, please do not stop the charging process before the battery is fully charged. The charger will automatically stop when the charging process is completed.

Battery Care:

- Never expose the battery to high temperatures, as this causes permanent battery capacity loss.
- Never deep-discharge or overcharge the battery, cells can be damaged irreversibly.
- If possible, always disconnect the battery from the load when being stored over long period of time.
- Store battery in a dry and cool place at about 40-60% of its rated capacity.

Errors and Troubleshooting

General Errors Description	Solutions
No LED lighting or blinking after connecting to the mains	<ul style="list-style-type: none"> • Check if the charger is connected to mains supply properly • Check if there are any problems with the mains supply
Red Mains-LED is on, charger is connected to the battery, but the charging process seems not working	<ul style="list-style-type: none"> • Check the connection to battery • Check if the battery is damaged or has been deeply discharged
Error-LED blinking (N x blinking / 2 secs pause)	<ul style="list-style-type: none"> • Please refer to the table below for LED Blinking Signals

LED Blinking Signals

Blinking Signal (continuous looping)	Error Description
1 x	Battery damaged
2 x	Battery voltage is too high or wrong battery connection
5 x	Charger temperature is too high during the charging process

Advice for Disposal



It is prohibited to dispose the charger with household or residual waste removal (WEEE-Richtlinie 2012/19/EU und EAG-VO). The charger must be disposed at designated disposal points. For the protection of our environment, please check at your communal administrative agency of your nearest disposal point.



The charger conforms to the RoHS-directive EU 2015/863, for the restriction of the use of certain hazardous substances in electrical and electronic equipment.



Disclaimer of Warranty

The warranty period (see our General Terms and Conditions) starts with the charger being dispatched by the manufacturer. The Company accepts liability by guaranteeing to working hours and spare parts only.

For damages caused by non-observance of the operating instructions, inappropriate start up or handling as well as dismantling, reconstructions or modifications of the charger, the warranty claim expires and the Company assumes no liability for consequential damages to any properties or persons in connection with or arising from the purchase and use of the charger.

We reserves the rights to configure the charger as per actual needs and the manual may not reflect the most updated conditions of the product at all times. Please contact us should you need any technological support.

Technical Specifications

DC Ausgang DC Output		LiFePO4 Batteries 3.2V/cell (nom.)	Li-ion Batteries 3.6V/cell (nom.)	Lead-based Batteries
Ladespannung max. Charge Volt. max. (+/-1%)	16S	14S	48V	
	57.6V	58.8V		
Ladestrom max. Charge Current max. (+/-1%)	35A	35A	35A	
Wirkungsgrad max. Efficiency max.	>93% @ 230V			
Ausgangsleistung, nom. Output Power, nom.	2000W			
Restwelligkeit Ripple	<1%			
Rückstrom Back Current	<1mA			
Ladekabel Charge Cable	1.2m Kabel mit 2-wege schraube klemmleiste 1.2m cable with 2-way screw terminal block			
AC Eingang AC Input				
Eingangsspannung Input Voltage	180...240VAC / 50...60Hz			
Netzkabel & Stecker Power Cord & Plug	Länderspezifisch Country Specific			
Gehäuse Enclosure				
Werkstoff Material	Metallgehäuse, lackiert Metal housing, painted			
Abmessungen / Gewicht Dimension / Weight	307 x 190 x 76 mm / ca. 5.0kg			
LED-Anzeigen LED-Indicators	Netz-, Error-, Laden-, Batt.-Voll Anzeige Mains-, Error-, Charging-, Batt.-Full Indicator			
Schutzklasse Protection Class	1			
IP Klasse IP Code	IP20			
Einsatztemperaturbereich Operating Temp.	-20°C to +40°C			
Kühlung Cooling	Leistungsabhängiger Lüfter Fan Cooling			
Besonderheiten Special Features				
4-Stufen Ladecharakteristik** 4-Step Charge Characteristics**	Abschaltung bei "Batterie-Voll" (Ladestromerkennung) Charge Cut-off at "Battery-Full" (Current Detection)			
Ladefreigabe Charge Enable (opt.)***	Kabel f. Ladefreigabe / Ladesperre Cable f. Charge Enable / Charge Disable			
Wegfahrsperre Ignition-Lock***	2-Adriges Kabel -> (Relaiskontakt) 2-Core Cable -> (Dry-contact)			
Ladeparameter Charge Parameter	Ladeprofilanpassung über IR-Schnittstelle Charge Profile Configurable via IR-Port			
Automat. Batterie Weckfunktion Automat. Battery Wake-up	Nach dem Einschalten weckt der Lader das BMS durch definierte Spannungspulse The charger, after "Power-on", activates the BMS with pre-defined voltage pulses			
Geräteschutz Device Protection	Übertemperatur-, Kurzschluss-, Verpolung-, Überlastschutz Over temperature-, Short Circuit-, Reverse Polarity-, Overload Protection			
Zertifizierungen Certification		CE		

Spezifikationen der Akkuhersteller sind vorrangig zu beachten! | Specifications of the battery manufacturer take priority!

** Abweichende Ladeprofile auf Anfrage | Different charge profiles available on request.

*** Optionale Varianten auf Anfrage | Optional features available on request.

Subject to technical modifications. We assume no liability for misprints.