## PQ-LFP12300ABT








- Long Cycle Life: Offers up to 20 times longer cycle life and up to five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- Light Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- High Power: Delivers twice the power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- Wide Temperature Range: -20°C ~ +60°C
- Superior Safety: Within the Lithium-ion battery family Lithium Iron Phosphate also known as LiFePO4 chemistry is the safest and greatly reduces the risk of explosion or combustion due to high impact, over charging or short circuit situation.
- Increased Flexibility: Modular design enables deployment of series and parallel connected batteries.


## Dimensions

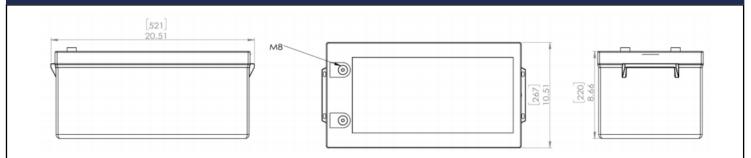


Specification			
	Nominal Voltage	12.8V	
	Rated Capacity		300Ah
	Energy		3840Wh
Electrical	Max Series Pcs.	45	
Characteristics	Max Parallel Pcs.	4P	
	Circuit Protection	Over charge, Over discharge, Over current, Over temp, Short, Internal cell balancing	
	Internal Resistance (AC)	≤20mΩ	
Charge	Charge Voltage	14.4±0.2V (Float voltage 13.6V~14.2V)	
	Standard Cut-off Voltage	10V	
	Charge Current	≤150A	
Discharge	Max. Continuous discharge Current	150A	
	Standard discharge Current	60A(0.2C)	
	Peak Discharge current	250A(3s); 800A(20ms)	
Environmental	Charge Temperature	0°C~+55°C	@60±25% Relative Humidity
	Discharge Temperature	-20°C~+60°C	
	Storage Temperature	0°C~+40°C	
Dimensions	Group 8D	521±2mm * 267±2mm * 220±2mm	
Case / IP class	Plastic case / IP65		
Terminal	M8		
Approx. Weight	32.7kg±0.5kg		
Extended functions	With Bluetooth		


## PQ-LFP12300ABT



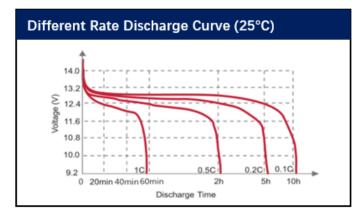




Different DOD Discharge Cycle Life Curve



Different Temperature Discharge Curve (0.5C)



Charging Characteristics (0.5C-25°C)

