

## eneloop lite \*\*

## Ideal for devices requiring low-to-medium power

eneloop lite batteries are ideal for devices requiring low-to-medium power, such as DECT phones and remote controls.


They can be recharged up to 3000 times<sup>(1)</sup> which makes it even more economically and environment-friendly.







(1) Panasonic internal IEC 61951-2 2011(7.5.1.3) testing; 1000 times according to Panasonic internal IEC 61951-2 2017(7.5.1.4) testing.











## eneloop lite \*\*





AAA > 550 mAh<sup>(1)</sup>
Minimum capacity












FSC® N003949

**FSC** 



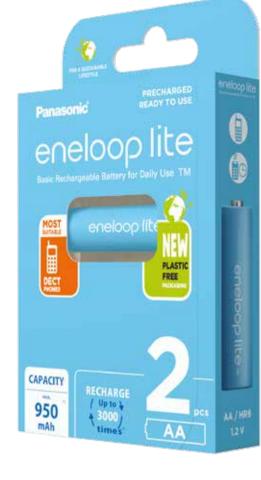

Item code	Size	Min. Capacity	Global Code	CSU EAN	Batteries/ CSU	CSU/ Carton
52331160	AA	950 mAh	BK-3LCCE/2BE	5410853064220	2	20
52361160	AAA	550 mAh	BK-4LCCE/2BE	5410853064336	2	20
52361162	AAA	550 mAh	BK-4LCCE/2DE	5410853065005	2	20
52361199	AAA	550 mAh	BK-4LCCE/4BE	5410853064350	4	20

(1) Panasonic internal IEC 61951-2(7.3.2) testing – varies according to conditions of use.
(2) Panasonic internal IEC 61951-2 2011(7.5.1.3) testing; 1000 times according to Panasonic internal IEC 61951-2 2017(7.5.1.4) testing.
(3) Battery tested at 20°C ambient temperature self-discharge condition 0.2lt (E.V.=1.0V).
(4) More info about "Memory Effect" on p. 19

