



VL-2330




SPECIFICATIONS

| Name | VL-2330 |
|----------------------------|------------|
| Nominal voltage [V] | 3 |
| Nominal capacity [mAh] | 50.0 |
| Continuous drain [mA] | 0.1 |
| Operating temperature [°C] | -20 to +60 |
| Weight [g] | 3.5 |


DISCHARGE TEMPERATURE CHARACTERISTICS

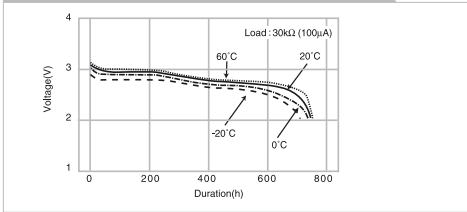

CONSUMPTION CURRENT VS. DURATION TIME

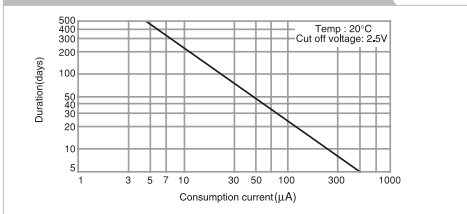


VL-3032




SPECIFICATIONS

| Name | VL-3032 |
|----------------------------|------------|
| Nominal voltage [V] | 3 |
| Nominal capacity [mAh] | 100.0 |
| Continuous drain [mA] | 0.2 |
| Operating temperature [°C] | -20 to +60 |
| Weight [g] | 6.2 |

DISCHARGE TEMPERATURE CHARACTERISTICS

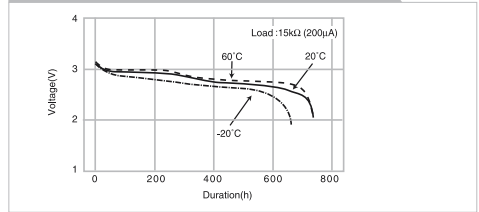

CONSUMPTION CURRENT VS. DURATION TIME

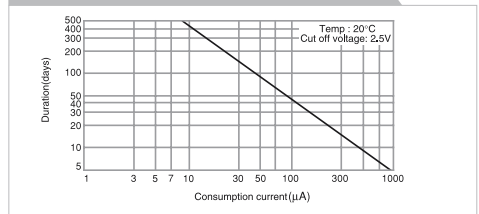

CYCLE LIFE (VL SERIES)

