


## 6LR61AD POWERLINE

### DIMENSIONS (MM)



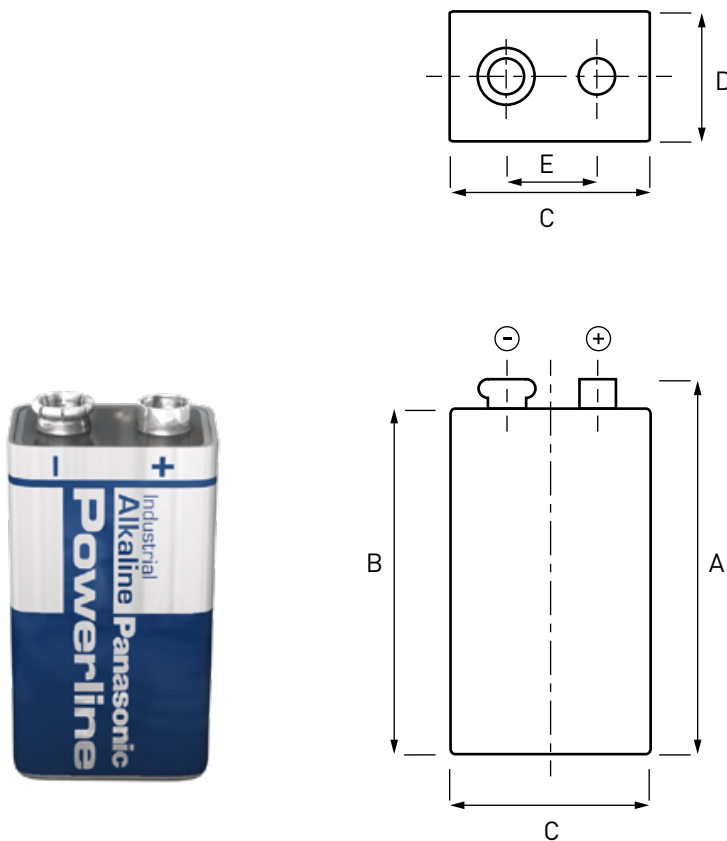


IEC dimensions	Maximum	Minimum
A	48.5	46.5
B	46.4	
C	26.5	24.5
D	17.5	15.5
E	12.95	12.45

<b>Specifications</b>	9V / 6LR61 / 6AM6 / MN1604 / 1604A / 1604AC
<b>Made in</b>	Belgium
<b>Type</b>	Alkaline Foil
<b>Nominal voltage (V)</b>	9.0
<b>Electrolyte</b>	Potassium Hydroxide
<b>Average weight (g)</b>	43.0
<b>Storage temp. range</b>	+10°C [50°F] ~ + 25°C [77°F]
<b>Operating temp. range</b>	-20°C [-4°F] ~ + 55°C [131°F]
<b>Average Impedance</b>	+/- 2,3Ω @ 1kHz fresh
<b>Heavy metals</b>	No added Mercury (Hg), Cadmium (Cd) or Lead (Pb)
<b>Compliant to</b>	IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC Nordic Ecolabel
<b>Recommended cut off voltage</b>	5.4V per battery

## 6LR61AD POWERLINE

### TYPICAL DISCHARGE VALUES

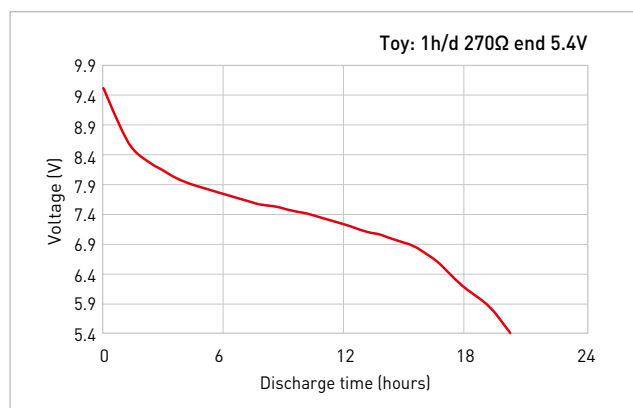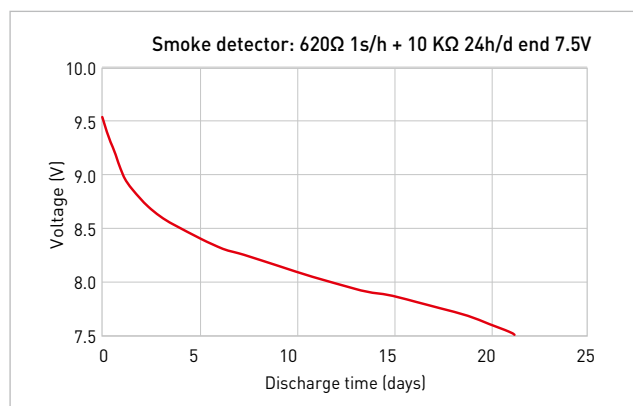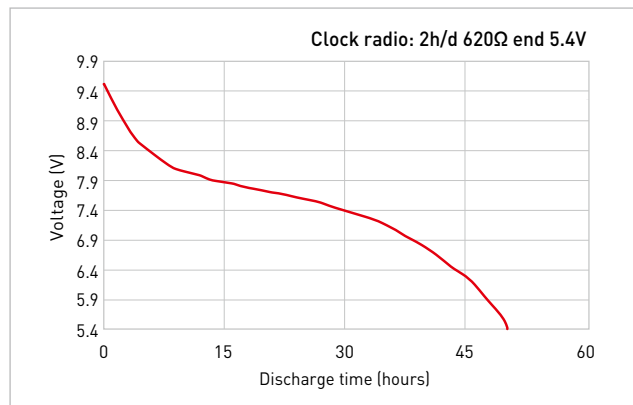

### DISCHARGE TEMPERATURE CHARACTERISTICS

