
PQ-LFP12120B








Charge	Stanuaru Cut-On Voltage	100	
	Charge Current	≤30A	
Discharge Environmental	Max. Continuous discharge Current	30A	
	Standard discharge Current	24A(0.2C)	
	Peak Discharge current	40A(3s); 100A(20ms)	
	Charge Temperature	0°C~+55°C	
	Discharge Temperature	-20°C~+60°C	@60±25% Relative Humidity
	Storage Temperature	0°C~+ 40°C	
Dimensions	260±2mm * 170±2mm * 208±2mm		
Case / IP class	Plastic case / IP65		
Terminal	M8		
Approx. Weight	12.2kg±0.2kg		
Extended functions	/		

PQ-LFP12120B

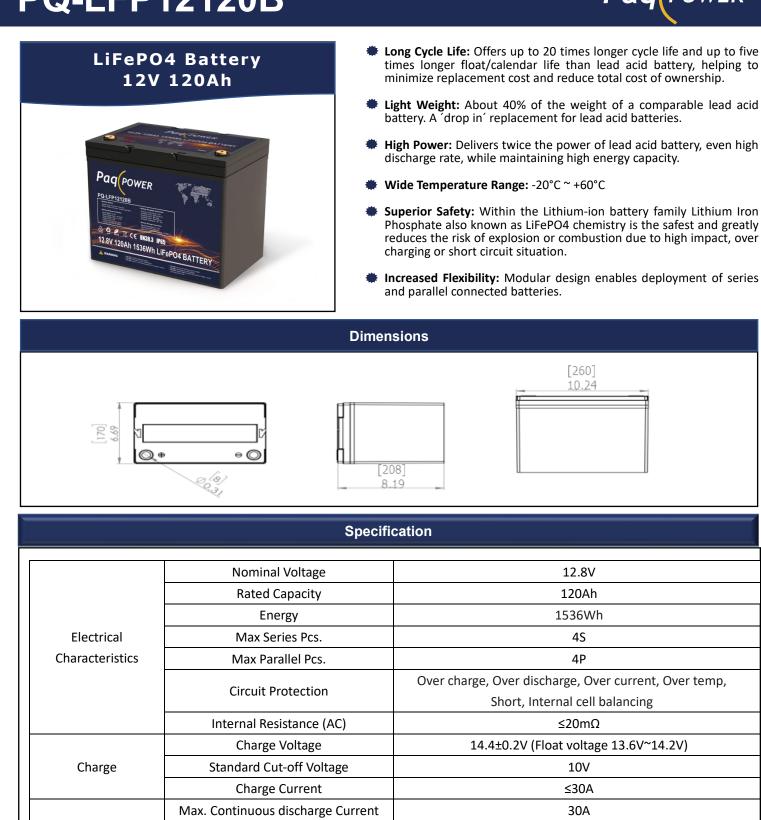

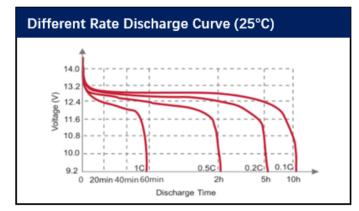


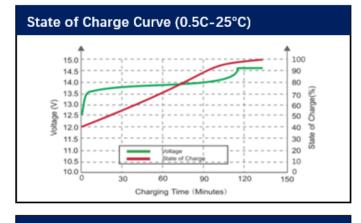





Depth of Discharge (DOD)

Different Temperature Discharge Curve (0.5C)



Charging Characteristics (0.5C-25°C)



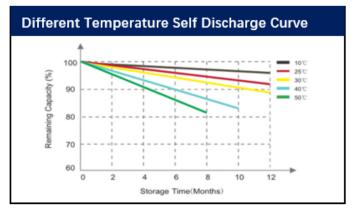

Alsvej 5 | 8940 Randers SV | Denmark | +45 8711 9999 | info@paqpower.com | www.paqpower.com