




**NEW BK-310CHU**

DIMENSIONS (MM)

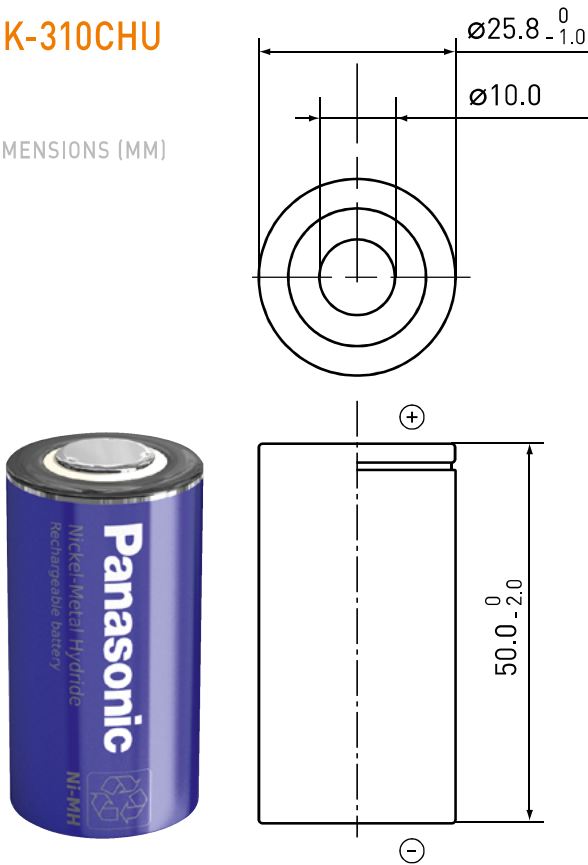


HIGH RATE DISCHARGE & HIGH TEMPERATURE TYPE **PH** TYPE C SIZE (HR26/50)

**TYPICAL CHARGE CHARACTERISTICS**

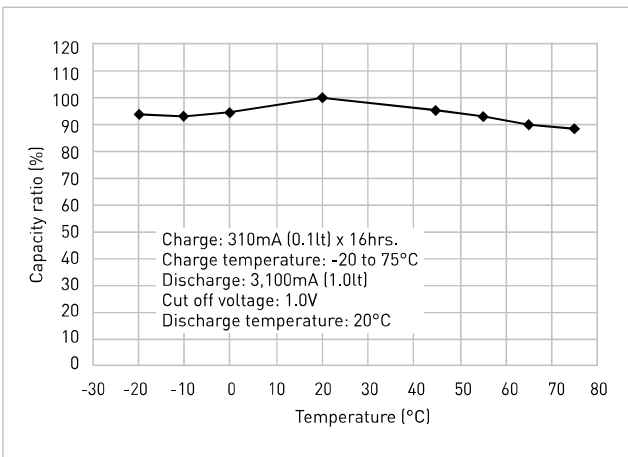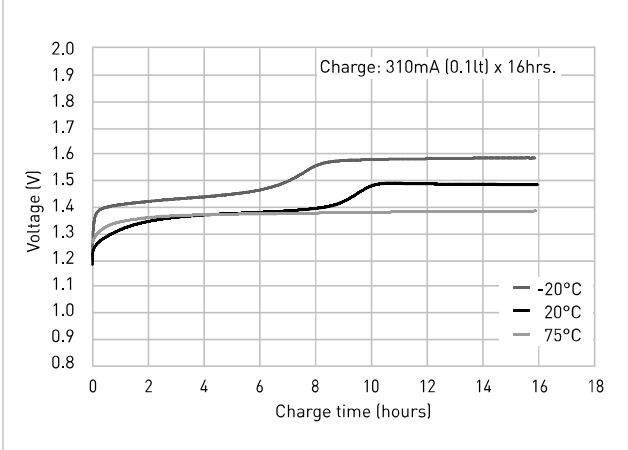

Specifications		BK-310CHU	
Diameter (mm)		25.8 +0/-1.0	
Total height (mm)		50.0 +0/-2.0	
Approximate weight (g)		80	
Nominal voltage (V)		1.2	
Discharge capacity*1	Typical capacity*2 (mAh)	3,300	
	Nominal capacity*3 (mAh)	3,100	
Approx. internal impedance at 1,000Hz at charged state (mΩ)		5	
Charge	Standard (mA x hrs.)	310 x 16	
	Rapid*4 (mA x hrs.)	1,550 x 2.4	
	Low rate (mA x hrs.)	155 x 32	
Ambient temperature	Charge (°C)	Low rate	-20 to 75
		Standard	-20 to 75
		Rapid	-20 to 60
Ambient temperature	Discharge (°C)	Low rate	-20 to 75
		Standard	-20 to 75
		Rapid	-20 to 60
Ambient temperature	Storage (°C)	<1 year	-20 to 35
		<6 months	-20 to 45
		<1 month	-20 to 55
		<1 week	-20 to 65

**TYPICAL DISCHARGE CHARACTERISTICS**

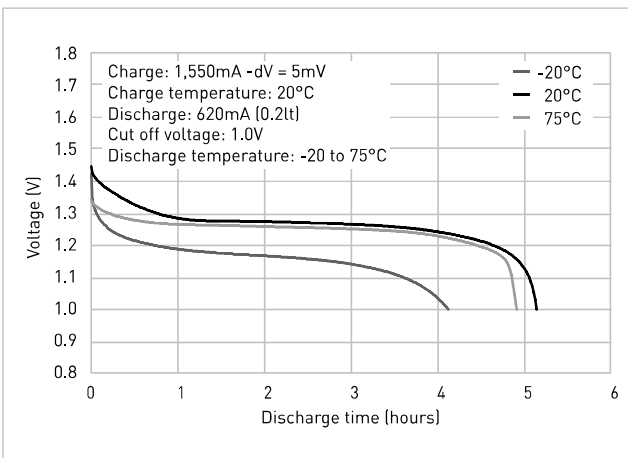

\*1 After charging at 0.1It for 16 hours, discharging at 0.2It.  
 \*2 Average capacity (mAh). For reference only.  
 \*3 Rated capacity (mAh).  
 \*4 Need specially designed control system. Please contact Panasonic for details.