



Issue	0	Date	08/2017	Page	1/9
-------	---	------	---------	------	-----

	Written by	Approved by
Position	Assistant Manager	Chief Technical Officer
Name	S.H.Jung	C.B.Lee
Signature		

# STANDARD SPECIFICATION

PRIMARY LITHIUM THIONYL CHLORIDE BATTERY

**SB-D02 Hybrid**  
(with VSCM 005R4 505 U)

1	08/2017	
Rev.	Date	Issued by



Issue	0	Date	08/2017	Page	2/9
-------	---	------	---------	------	-----

# STANDARD SPECIFICATION

## SB-D02 Hybrid

### ► CONTENTS ◀

TYPICAL VALUES

CONSTRUCTION

VISUAL ASPECT

TESTS

STORAGE

WARNING

GUARANTEE

TRANSPORT

INCOMING INSPECTION

PACKING

BATTERY DIMENSION

0	08/2017		<i>Original Document</i>
Rev.	Date	Issued by	Revision Items

Issue	0	Date	08/2017	Page	3/9
-------	---	------	---------	------	-----

# STANDARD SPECIFICATION

## SB-D02 Hybrid

### TYPICAL VALUES

Model Name	SB-D02 Hybrid (with VSCM 005R4 505(U))
Nominal Voltage	3.6V
Key Characteristic	High capacity, Enhanced start up
Nominal Capacity	19Ah (Resistance 600Ω/Current 6mA at 20°C, Cut-off Voltage 2.0V; Varies according to the discharge current, the temperature and the cut-off voltage)
Maximum Continuous Current	100mA (If higher currents are needed, require consulting Vitzrocell.)
Maximum Pulse Current	2.5A (Max. 0.1s Pulse Current to 3.0V Max. pulse current/0.1 second pulses, drained every 2min. at +20°C from undischarged cell with 10μA base current, yield voltage readings above 3.0V. It varies according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions, Consult Vitzrocell)
Operating Temperature Range	-55 ~ 85°C (Capacity reduce or operation voltage is lower at the beginning of pulses according to temperature.)
Typical Weight	107.0g

0	08/2017		<i>Original Document</i>
Rev.	Date	Issued by	Revision Items



Issue	0	Date	08/2017	Page	4/9
-------	---	------	---------	------	-----

# STANDARD SPECIFICATION

## SB-D02 Hybrid

### CONSTRUCTION

Electrode Design                      Concentric electrode (Bobbin type)

### VISUAL ASPECT

When inspected with naked eyes, there should be no corrosion, no electrolyte leakage or swelling. Marking should be readable.

### TESTS (SB-D02)

#### Environmental

##### Altitude Simulation

Test cells shall be stored at a pressure of 11.6 kPa or less for at least six hours at ambient temperature ( $20 \pm 5$  °C).

Cells meet this requirement if there is no mass loss, no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure.

##### Vibration

Vibration on three perpendicular axes.

- Frequency                                      : 10 to 55Hz
- Peak to peak amplitude                    : 1.6mm
- Test duration                                   :  $95 \pm 5$ min/axis

The cell must retain its operational characteristics and normal visual aspect.

0	08/2017		<i>Original Document</i>
Rev.	Date	Issued by	Revision Items



Issue	0	Date	08/2017	Page	5/9
-------	---	------	---------	------	-----

# STANDARD SPECIFICATION

## SB-D02 Hybrid

### Thermal

Test cells are to be stored for at least six hours at a test temperature equal to  $75 \pm 2 \text{ }^\circ\text{C}$ , followed by storage for at least six hours at a test temperature equal to  $-40 \pm 2 \text{ }^\circ\text{C}$ . The maximum time interval between test temperature extremes is 30 minutes. this procedure is to be repeated 10 times, after which all test cells and batteries are to be stored for 24 hours at ambient temperature ( $20 \pm 5 \text{ }^\circ\text{C}$ ).

Cells meet this requirement if there is no mass loss, no leakage, no venting, no disassembly, no rupture and no fire.

### Drop

2 drops per each plane (randomly oriented) onto a concrete floor from an height of 1.0m without any explosion or fire.

### Mechanical

#### Shock

Shock applied to each of the three perpendicular axes.

- Average acceleration : 75G

- Maximum acceleration : 175G

The cell must retain its operational characteristics and normal visual aspect.

#### Impact

The test sample cell or component cell is to be placed on a flat surface. A 15.8 mm diameter bar is to be placed across the centre of the sample. A 9.1 kg mass is to be dropped from a height of  $61 \pm 2.5 \text{ cm}$  onto the sample.

Cells meet this requirement if their external temperature does not exceed  $170 \text{ }^\circ\text{C}$  and there is no disassembly and no fire within six hours of this test.

0	08/2017		<i>Original Document</i>
Rev.	Date	Issued by	Revision Items

Issue	0	Date	08/2017	Page	6/9
-------	---	------	---------	------	-----

# STANDARD SPECIFICATION

## SB-D02 Hybrid

### Electrical

#### Short

The cell shall be subjected to a short circuit condition with a total external resistance of less than 0.1 ohm at  $20 \pm 5^{\circ}\text{C}$ . This short circuit condition is continued for at least one hour after the cell external case temperature has returned to  $20 \pm 5^{\circ}\text{C}$ . Cells meet this requirement if their external temperature does not exceed  $170^{\circ}\text{C}$  and there is no disassembly, no rupture and no fire within six hours of this test.

#### Overcharge

- Charging current : 150mA
- Duration time : 135hrs

The cells meet this requirement if there is no disassembly and no fire within seven days of the test.

#### Forced Discharge

Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12 V D.C. up to 100% of nominal capacity. The cells meet this requirement if there is no disassembly and no fire within six hours of this test.

### STORAGE

#### Condition

Should be stored in dry and cool conditions (at not exceeding  $30^{\circ}\text{C}$ ). Storage at higher temperature may make cell capacity and initial cell voltage lower.

0	08/2017		<i>Original Document</i>
Rev.	Date	Issued by	Revision Items



# STANDARD SPECIFICATION

## SB-D02 Hybrid

### WARNING

#### Safety

- Do not remove the cells from their original packing before use.
- Do not store the cells in bulk in order to avoid accidental short circuit.
- Do not disassemble.
- Do not recharge.
- Do not solder directly in the cell.
- Do not mix new and used cells or cells from different origins.
- Respect the polarities of the cell.

#### Sentences on cell

Fire, explosion, and severe burn hazard. Do not recharge, crush, disassemble, heat above 212°F (100°C) or incinerate. Keep battery out of reach of children and in original package until ready to use. Dispose of used batteries promptly.

### GUARANTEE

#### Minimum Value

	initial	After 1 year storage at 30°C max.
Open Circuit Voltage	3.65V	3.65V
Closed Circuit Voltage (after 5sec on 380mA)	3.00V	2.8V
Capacity (on 6mA)	18.0Ah	17.8Ah

※After 1 year, self-discharge rate is about 1% per year.

0	08/2017		Original Document
Rev.	Date	Issued by	Revision Items

Issue	0	Date	08/2017	Page	8/9
-------	---	------	---------	------	-----

# STANDARD SPECIFICATION

## SB-D02 Hybrid

### TRANSPORT

#### Restriction

Lithium Batteries are dangerous goods, UN 3090. Therefore they are generally subject to transport regulations depending on the transport mode.

- Lithium Content of SB-D02 : 4.90g

Therefore the SB-D02 Hybrid is regulated by suitable packing, marking and transportation in the level of Class 9.

### OUTGOING INSPECTION

#### Comprehensive

The SB-D02 hybrid is 100% inspected by open circuit voltage (OCV) and closed circuit voltage (CCV)

#### Sampling

Vitrocell carries out the sampling inspection as per the following standard.

- Visual aspect
- Capacity
- Dimension

- Sampling standard

ISO	American
KSQ ISO 2859-1	MIL-STD-105D

- Acceptable Quality Levels (AQL)

Sampling Level	AQL
S-2	0.10%

0	08/2017		<i>Original Document</i>
Rev.	Date	Issued by	Revision Items



Issue	0	Date	08/2017	Page	9/9
-------	---	------	---------	------	-----

# STANDARD SPECIFICATION

## SB-D02 Hybrid

### PACKING

Inner


Unit	Quantity (EA)	Net Weight (g)
1pc(bulk)	25	2700

Outer

Unit	Q'ty (EA)	Net Wt. (kg)	Gross Wt. (kg)	CBM	Dimension (mm)
1pc	100	10.7	11.7	0.0337	510X330X200

### BATTERY DIMENSION

SB-D02 Hybrid (with VSCM 5R4 505 U)

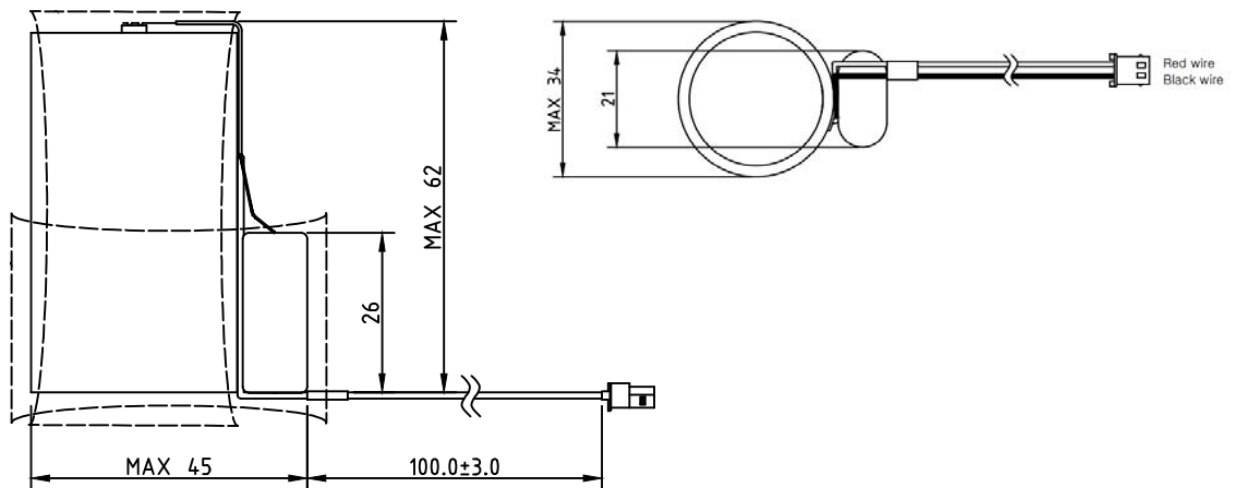

0	08/2017		Original Document
Rev.	Date	Issued by	Revision Items