

# Technical specifications


## Alkaline

Powerline

Panasonic Typical Dimensions



6LR61AD

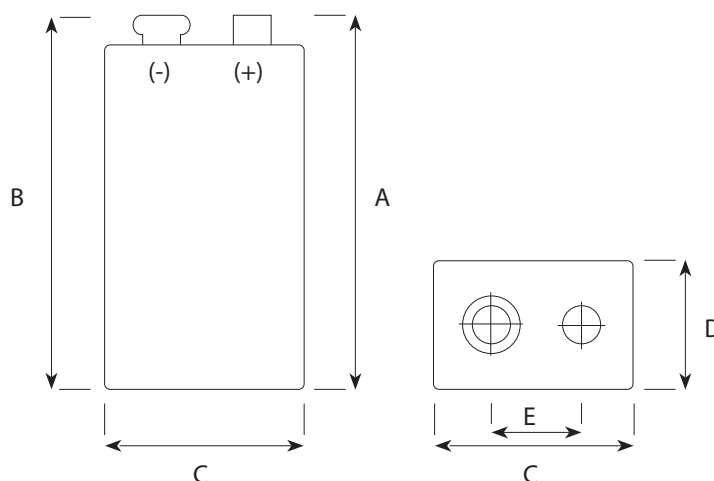

Dimension	IEC Dimensions (mm)		Panasonic Dimensions (mm)
	Maximum	Minimum	Typical
A	48,5	46,5	48,0
B	46,4		44,2
C	26,5	24,5	25,6
D	17,5	15,5	16,5
E	12,95	12,45	12,7

## Specifications

<b>Name</b>	9V / 6LR61 / 6AM6 / MN1604 / 1604A / 1604AC
<b>Made in</b>	Belgium
<b>Type</b>	Alkaline Foil
<b>Nominal Voltage</b>	9 Volt
<b>Electrolyte</b>	Potassium Hydroxide
<b>Average weight</b>	44,3 g
<b>Storage temp. range</b>	+10°C ~ +25°C
<b>Operating temp. range</b>	-20°C ~ +45°C
<b>Average Impedance</b>	+/- 2,3 Ohm @ 1kHz fresh
<b>Heavy metals</b>	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
<b>Compliant to</b>	IEC 60086 non dangerous goods regulation Nordic ecolabeling (white Swan) EC directive 91/157EC & 98/101EC
<b>Recommended cut off voltage</b>	4,8V per battery

For more information:

[www.panasonic-industrial.com](http://www.panasonic-industrial.com)

**Panasonic**  
ideas for life

## Typical discharge values

6LR61AD

