
PQ-LFP1272A





- Long Cycle Life: Offers up to 20 times longer cycle life and up to five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- Light Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- High Power: Delivers twice the power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- Wide Temperature Range: -20°C ~ +60°C
- Superior Safety: Within the Lithium-ion battery family Lithium Iron Phosphate also known as LiFePO4 chemistry is the safest and greatly reduces the risk of explosion or combustion due to high impact, over charging or short circuit situation.
- Increased Flexibility: Modular design enables deployment of series and parallel connected batteries.


Dimensions

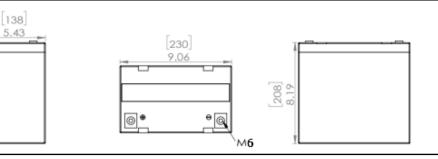


Specification			
Electrical Characteristics	Nominal Voltage	12.8V	
	Rated Capacity	72Ah	
	Energy	922Wh	
	Max Series Pcs.	4S	
	Max Parallel Pcs.	4P	
	Circuit Protection	Over charge, Over discharge, Over current, Over temp, Short, Internal cell balancing	
	Internal Resistance (AC)	≤20mΩ	
Charge	Charge Voltage	14.4±0.2V (Float voltage 13.6V~14.2V)	
	Standard Cut-off Voltage	10V	
	Charge Current	≤36A	
Discharge	Max. Continuous discharge Current	60A	
	Standard discharge Current	14.4A(0.2C)	
	Peak Discharge current	90A(3s); 120A(20ms)	
Environmental	Charge Temperature	0°C~+55°C	@60±25% Relative Humidity
	Discharge Temperature	-20°C~+60°C	
	Storage Temperature	0°C~+ 40°C	
Dimensions		230±2mm * 138±2mm * 208±2mm	
Case / IP class	Plastic case / IP65		
Terminal	M8		
Approx. Weight	7.2kg±0.2kg		
Extended functions	/		


PQ-LFP1272A



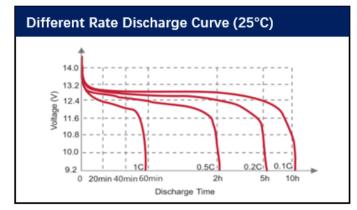


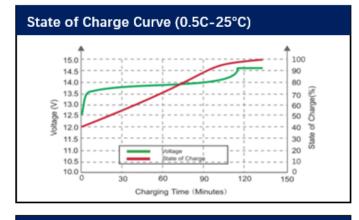





Different Temperature Discharge Curve (0.5C)



Charging Characteristics (0.5C-25°C)

