



BR-1220




SPECIFICATIONS

Name	BR-1220
Nominal voltage (V)	3
Nominal capacity (mAh)	35
Continuous drain (mA)	0.03
Operating temperature (°C)	-30 to +80
Weight (g)	0.7


DISCHARGE TEMPERATURE CHARACTERISTICS

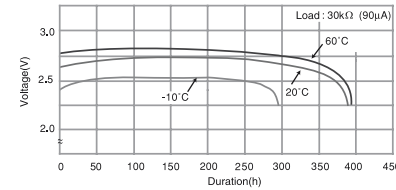


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

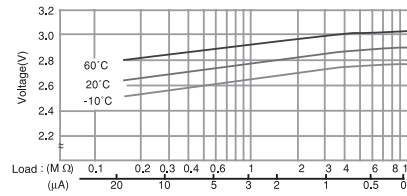

CAPACITY VS. LOAD RESISTANCE

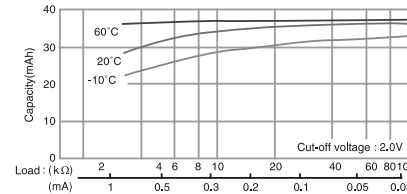


BR-1225




SPECIFICATIONS

Name	BR-1225
Nominal voltage (V)	3
Nominal capacity (mAh)	48
Continuous drain (mA)	0.03
Operating temperature (°C)	-30 to +80
Weight (g)	0.8


DISCHARGE TEMPERATURE CHARACTERISTICS

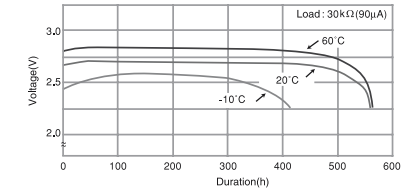

OPERATING VOLTAGE VS. DISCHARGE CURRENT*

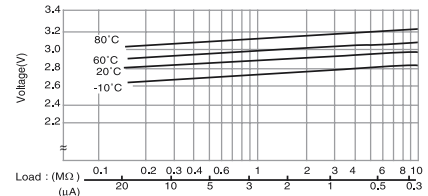

CAPACITY VS. LOAD RESISTANCE

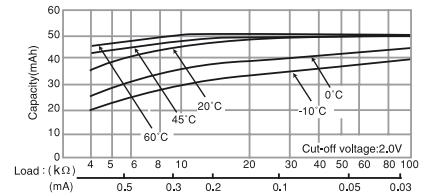

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.
 * Voltage at 50% discharge depth.