


2 POLY-CARBONMONOFLUORIDE LITHIUM BATTERIES (BR SERIES)


BR-425




SPECIFICATIONS

Name	BR-425
Nominal voltage (V)	3
Nominal capacity (mAh)	25
Continuous drain (mA)	0.5
Operating temperature (°C)	-30 to +80
Weight (g)	0.6


DISCHARGE TEMPERATURE CHARACTERISTICS

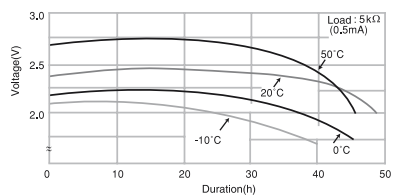


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

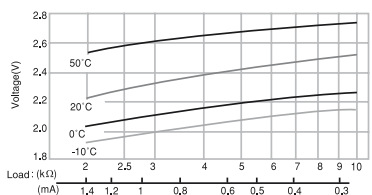

CAPACITY VS. LOAD RESISTANCE

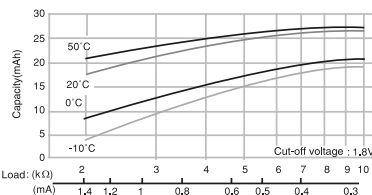


BR-435




SPECIFICATIONS

Name	BR-435
Nominal voltage (V)	3
Nominal capacity (mAh)	50
Continuous drain (mA)	1.0
Operating temperature (°C)	-30 to +80
Weight (g)	0.9

DISCHARGE TEMPERATURE CHARACTERISTICS

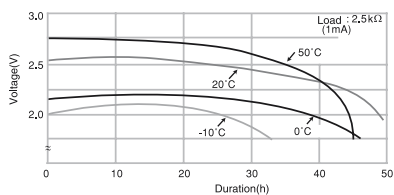

OPERATING VOLTAGE VS. DISCHARGE CURRENT*

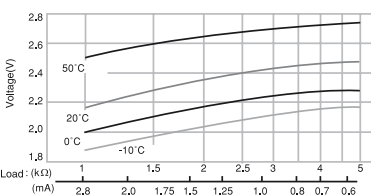

CAPACITY VS. LOAD RESISTANCE

