


MANGANESE DIOXIDE LITHIUM BATTERIES (CR SERIES)

MANGANESE DIOXIDE LITHIUM BATTERIES (CR SERIES)


CR-1025




SPECIFICATIONS

Name	CR-1025
Nominal voltage (V)	3
Nominal capacity (mAh)	30
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	0.7


DISCHARGE TEMPERATURE CHARACTERISTICS

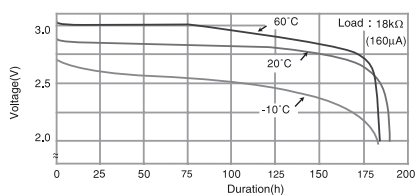


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

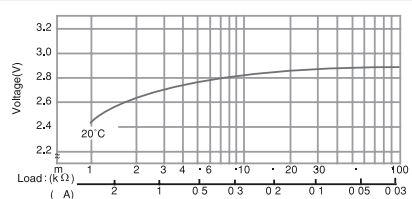

CAPACITY VS. LOAD RESISTANCE

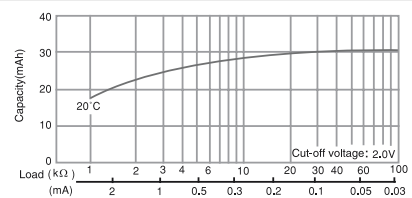


CR-1216




SPECIFICATIONS

Name	CR-1216
Nominal voltage (V)	3
Nominal capacity (mAh)	25
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	0.7


DISCHARGE TEMPERATURE CHARACTERISTICS

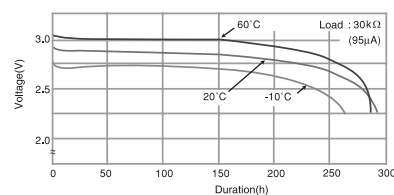


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

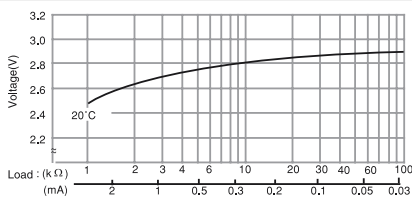

CAPACITY VS. LOAD RESISTANCE

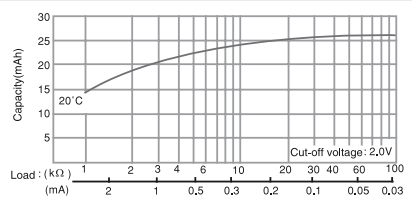


CR-1220




SPECIFICATIONS

Name	CR-1220
Nominal voltage (V)	3
Nominal capacity (mAh)	35
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	1.2


DISCHARGE TEMPERATURE CHARACTERISTICS

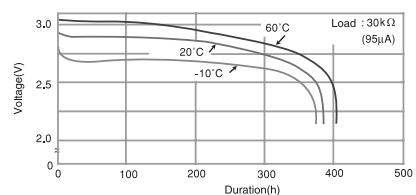


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

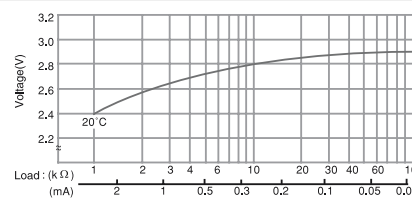

CAPACITY VS. LOAD RESISTANCE

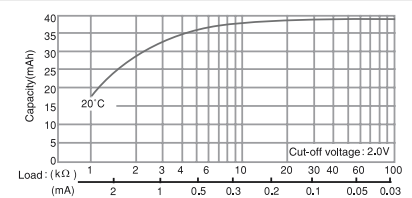


CR-1612




SPECIFICATIONS

Name	CR-1612
Nominal voltage (V)	3
Nominal capacity (mAh)	40
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	0.8

DISCHARGE TEMPERATURE CHARACTERISTICS

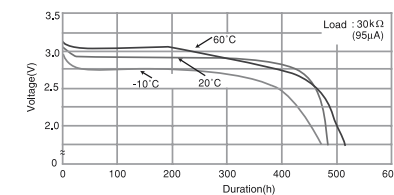

OPERATING VOLTAGE VS. DISCHARGE CURRENT*

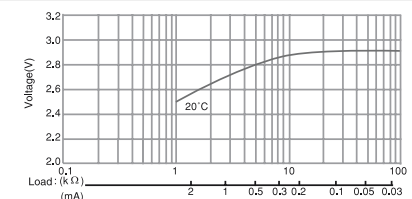

CAPACITY VS. LOAD RESISTANCE

